




C Y L I N D E R S

3000 PSI Welded Cross Tube Cylinders



FEATURES:

- 100% tested for quality assurance
- Hard chrome rod plating for corrosion & wear resistance
- Cast steel end fittings for high strength & low cost
- Top port design
- SAE O-ring ports for reliable & leak-free connection
- Thread-in gland design for serviceability
- Grease zerks included for extended pin life
- High luster black paint for protection from the elements
- Individually bagged & boxed for secure storage & transport

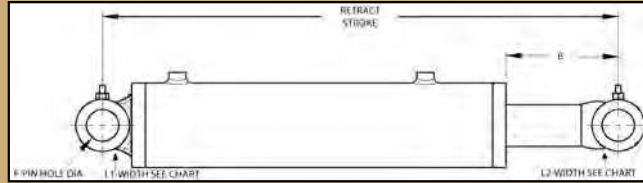

| MODEL | BORE | PORTS | CROSS TUBE WIDTH | | B | F |
|------------|------|-------|------------------|------------|------|------|
| | | | L1-BASE END | L2-ROD END | | |
| WWXT1500-S | 1.5 | SAE 4 | 2.25 | 2.00 | 2.62 | 3/4 |
| WWXT2000-S | 2.0 | SAE 6 | 2.75 | 2.25 | 2.25 | 1 |
| WWXT2500-S | 2.5 | SAE 8 | 3.25 | 2.25 | 2.25 | 1 |
| WWXT3000-S | 3.0 | SAE 8 | 3.75 | 2.25 | 2.25 | 1 |
| WWXT3500-S | 3.5 | SAE 8 | 4.25 | 2.25 | 4.00 | 1.25 |
| WWXT4000-S | 4.0 | SAE 8 | 4.75 | 2.50 | 3.75 | 1.50 |

| MODEL | BORE x STROKE | | | RETRACT | ROD DIA. | COLUMN LOAD RATINGS | WT/LBS | LIST PRICE |
|--------------|---------------|---|----|---------|----------|---------------------|--------|------------|
| WWXT1504-S | 1.5 | X | 4 | 12 | 1 | FULL PSI | 8 | 167.00 |
| WWXT1506-S | 1.5 | X | 6 | 14 | 1 | FULL PSI | 9 | 174.00 |
| WWXT1508-S | 1.5 | X | 8 | 16 | 1 | FULL PSI | 10 | 183.00 |
| WWXT1510-S | 1.5 | X | 10 | 18 | 1 | FULL PSI | 11 | 190.00 |
| WWXT1512-S | 1.5 | X | 12 | 20 | 1 | FULL PSI | 13 | 198.00 |
| WWXT1514-S | 1.5 | X | 14 | 22 | 1 | FULL PSI | 14 | 207.00 |
| WWXT1516-S | 1.5 | X | 16 | 24 | 1 | FULL PSI | 15 | 214.00 |
| WWXT1518-S | 1.5 | X | 18 | 26 | 1 | 4800 (270 PSI)* | 16 | 223.00 |
| WWXT2004-S | 2 | X | 4 | 12 | 1.25 | FULL PSI | 12 | 207.00 |
| WWXT2006-S | 2 | X | 6 | 14 | 1.25 | FULL PSI | 13 | 216.00 |
| WWXT2008-S | 2 | X | 8 | 16 | 1.25 | FULL PSI | 15 | 227.00 |
| WWXT2010-S | 2 | X | 10 | 18 | 1.25 | FULL PSI | 17 | 236.00 |
| WWXT2012-S | 2 | X | 12 | 20 | 1.25 | FULL PSI | 19 | 247.00 |
| WWXT2014-S | 2 | X | 14 | 22 | 1.25 | FULL PSI | 20 | 256.00 |
| WWXT2016-S | 2 | X | 16 | 24 | 1.25 | FULL PSI | 22 | 266.00 |
| WWXT2018-S | 2 | X | 18 | 26 | 1.25 | FULL PSI | 24 | 276.00 |
| WWXT2020-S | 2 | X | 20 | 28 | 1.25 | FULL PSI | 25 | 286.00 |
| WWXT2024-S | 2 | X | 24 | 32 | 1.25 | 7300 (2330 PSI)* | 29 | 306.00 |
| WWXT2030-S | 2 | X | 30 | 38 | 1.25 | 4900 (1560 PSI)* | 34 | 336.00 |
| WWXT2032-S | 2 | X | 32 | 40 | 1.25 | 4400 (1400 PSI)* | 36 | 347.00 |
| WWXT2036-S | 2 | X | 36 | 44 | 1.25 | 3500 (1120 PSI)* | 39 | 369.00 |
| WWXT2504-S | 2.5 | X | 4 | 12 | 1.50 | FULL PSI | 16 | 248.00 |
| WWXT2506-S | 2.5 | X | 6 | 14 | 1.50 | FULL PSI | 18 | 262.00 |
| WWXT2508-S | 2.5 | X | 8 | 16 | 1.50 | FULL PSI | 20 | 273.00 |
| WWXT2510-S | 2.5 | X | 10 | 18 | 1.50 | FULL PSI | 22 | 286.00 |
| WWXT2512-S | 2.5 | X | 12 | 20 | 1.50 | FULL PSI | 25 | 298.00 |
| WWXT2514-S | 2.5 | X | 14 | 22 | 1.50 | FULL PSI | 27 | 311.00 |
| WWXT2516-S | 2.5 | X | 16 | 24 | 1.50 | FULL PSI | 29 | 324.00 |
| WWXT2518-S | 2.5 | X | 18 | 26 | 1.50 | FULL PSI | 31 | 336.00 |
| WWXT2520-S | 2.5 | X | 20 | 28 | 1.50 | FULL PSI | 34 | 349.00 |
| WWXT2524-S | 2.5 | X | 24 | 32 | 1.50 | FULL PSI | 38 | 373.00 |
| WWXT2530-S | 2.5 | X | 30 | 38 | 1.50 | 10300 (2100 PSI)* | 45 | 411.00 |
| WWXT2532-S | 2.5 | X | 32 | 40 | 1.50 | 9200 (1880 PSI)* | 47 | 425.00 |
| † WWXT2536-S | 2.5 | X | 36 | 44 | 1.50 | 7400 (1510 PSI)* | 51 | Call |

*THESE MODELS HAVE A COLUMN LOAD RESTRICTION THAT LIMITS THE MAXIMUM PUSH LOAD THAT THE CYLINDER CAN SAFELY BE OPERATED AT.

† NON-STOCKED ITEMS AVAILABLE AT STANDARD LEAD-TIME.

CHECK OUR PRINCE WEBSITE OR CONTACT YOUR SALES REP TO VERIFY IF NON-STOCKED ITEMS ARE STILL ON HAND FOR IMMEDIATE SHIPMENT.



C Y L I N D E R S

3000 PSI Welded Cross Tube Cylinders

| MODEL | BORE x STROKE | | RETRACT | ROD DIA. | COLUMN LOAD RATINGS | WT/LBS | LIST PRICE |
|--------------|---------------|------|---------|----------|---------------------|--------|------------|
| WWXT3004-S | 3 | X 4 | 12 | 1.5 | FULL PSI | 19 | 291.00 |
| WWXT3006-S | 3 | X 6 | 14 | 1.5 | FULL PSI | 22 | 305.00 |
| WWXT3008-S | 3 | X 8 | 16 | 1.5 | FULL PSI | 24 | 318.00 |
| WWXT3010-S | 3 | X 10 | 18 | 1.5 | FULL PSI | 27 | 332.00 |
| WWXT3012-S | 3 | X 12 | 20 | 1.5 | FULL PSI | 29 | 346.00 |
| WWXT3014-S | 3 | X 14 | 22 | 1.5 | FULL PSI | 32 | 360.00 |
| WWXT3016-S | 3 | X 16 | 24 | 1.5 | FULL PSI | 34 | 373.00 |
| WWXT3018-S | 3 | X 18 | 26 | 1.5 | FULL PSI | 36 | 387.00 |
| WWXT3020-S | 3 | X 20 | 28 | 1.5 | 20700 (2930 PSI)* | 39 | 401.00 |
| WWXT3024-S | 3 | X 24 | 32 | 1.5 | 15200 (2150 PSI)* | 44 | 428.00 |
| WWXT3030-S | 3 | X 30 | 38 | 1.5 | 10300 (1460 PSI)* | 51 | 469.00 |
| WWXT3032-S | 3 | X 32 | 40 | 1.5 | 9200 (1300 PSI)* | 54 | 484.00 |
| WWXT3036-S | 3 | X 36 | 44 | 1.5 | 7400 (1050 PSI)* | 59 | 512.00 |
| WWXT3040-S | 3 | X 40 | 48 | 1.5 | 6100 (860 PSI)* | 63 | 538.00 |
| † WWXT3042-S | 3 | X 42 | 50 | 1.5 | 5675 (800 PSI) | 65 | Call |
| † WWXT3048-S | 3 | X 48 | 56 | 1.5 | 4400 (620 PSI)* | 73 | Call |
| † WWXT3508-S | 3.5 | X 8 | 18 | 1.75 | FULL PSI | 33 | Call |
| † WWXT3510-S | 3.5 | X 10 | 20 | 1.75 | FULL PSI | 36 | Call |
| † WWXT3512-S | 3.5 | X 12 | 22 | 1.75 | FULL PSI | 39 | Call |
| WWXT3514-S | 3.5 | X 14 | 24 | 1.75 | FULL PSI | 42 | 442.00 |
| † WWXT3516-S | 3.5 | X 16 | 26 | 1.75 | FULL PSI | 45 | Call |
| WWXT3518-S | 3.5 | X 18 | 28 | 1.75 | FULL PSI | 48 | 475.00 |
| WWXT3520-S | 3.5 | X 20 | 30 | 1.75 | FULL PSI | 51 | 492.00 |
| WWXT3524-S | 3.5 | X 24 | 34 | 1.75 | 26200 (2730 PSI)* | 57 | 526.00 |
| † WWXT3530-S | 3.5 | X 30 | 40 | 1.75 | 20200 (2100 PSI) | 67 | Call |
| † WWXT3532-S | 3.5 | X 32 | 42 | 1.75 | 16100 (1670 PSI)* | 70 | Call |
| † WWXT3536-S | 3.5 | X 36 | 46 | 1.75 | 13100 (1360 PSI)* | 76 | Call |
| † WWXT3540-S | 3.5 | X 40 | 50 | 1.75 | 10900 (1130 PSI)* | 82 | Call |
| † WWXT3548-S | 3.5 | X 48 | 58 | 1.75 | 7800 (810 PSI)* | 94 | Call |
| WWXT4008-S | 4 | X 8 | 18 | 2 | FULL PSI | 41 | 473.00 |
| † WWXT4010-S | 4 | X 10 | 20 | 2 | FULL PSI | 45 | Call |
| WWXT4012-S | 4 | X 12 | 22 | 2 | FULL PSI | 49 | 513.00 |
| † WWXT4014-S | 4 | X 14 | 24 | 2 | FULL PSI | 52 | Call |
| WWXT4016-S | 4 | X 16 | 26 | 2 | FULL PSI | 56 | 552.00 |
| WWXT4018-S | 4 | X 18 | 28 | 2 | FULL PSI | 60 | 571.00 |
| WWXT4020-S | 4 | X 20 | 30 | 2 | FULL PSI | 63 | 591.00 |
| WWXT4024-S | 4 | X 24 | 34 | 2 | 37200 (2960 PSI)* | 71 | 630.00 |
| † WWXT4030-S | 4 | X 30 | 40 | 2 | 24900 (1980 PSI)* | 82 | Call |
| † WWXT4032-S | 4 | X 32 | 42 | 2 | 2240 (1780 PSI)* | 85 | Call |
| † WWXT4036-S | 4 | X 36 | 46 | 2 | 18100 (1440 PSI)* | 93 | Call |
| † WWXT4040-S | 4 | X 40 | 50 | 2 | 14600 (1160 PSI)* | 100 | Call |
| † WWXT4042-S | 4 | X 42 | 52 | 2 | 13500 (1350 PSI) | 104 | Call |
| WWXT4048-S | 4 | X 48 | 58 | 2 | 10600 (840 PSI)* | 115 | 866.00 |

*THESE MODELS HAVE A COLUMN LOAD RESTRICTION THAT LIMITS THE MAXIMUM PUSH LOAD THAT THE CYLINDER CAN SAFELY BE OPERATED AT.

| UNIVERSAL SEAL KITS | |
|---------------------|-------------|
| PART NO. | DESCRIPTION |
| PMCK-WW1500 | 1.5 BORE |
| PMCK-WW2000 | 2 BORE |
| PMCK-WW2500 | 2.5 BORE |
| PMCK-WW3000 | 3 BORE |
| PMCK-WW3500 | 3.5 BORE |
| PMCK-WW4000 | 4 BORE |

† NON-STOCKED ITEMS AVAILABLE AT STANDARD LEAD-TIME.

CHECK OUR PRINCE WEBSITE OR CONTACT YOUR SALES REP TO VERIFY IF NON-STOCKED ITEMS ARE STILL ON HAND FOR IMMEDIATE SHIPMENT.