




C Y L I N D E R S

Standard 3000 PSI Welded Cross Tube Cylinders



FEATURES:

- 100% tested for quality assurance
- Hard chrome rod plating for corrosion & wear resistance
- Cast steel end fittings for high strength & low cost
- Top port design
- SAE O-ring ports for reliable & leak-free connection
- Thread-in gland design for serviceability
- Grease zerk included for extended pin life
- High luster black paint for protection from the elements
- Individually bagged & boxed for secure storage & transport

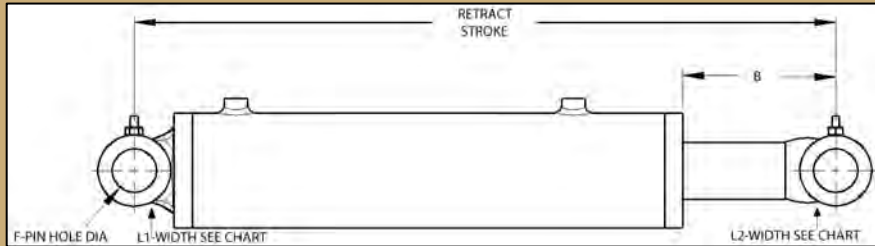

MODEL	BORE	PORTS	CROSS TUBE WIDTH		B	F
			L1-BASE END	L2-ROD END		
WWXT1500-S	1.5	SAE 4	2.25	2.00	2.62	3/4
WWXT2000-S	2.0	SAE 6	2.75	2.25	2.25	1
WWXT2500-S	2.5	SAE 8	3.25	2.25	2.25	1
WWXT3000-S	3.0	SAE 8	3.75	2.25	2.25	1
WWXT3500-S	3.5	SAE 8	4.25	2.25	4.00	1.25
WWXT4000-S	4.0	SAE 8	4.75	2.50	3.75	1.50

MODEL	BORE x STROKE			RETRACT	ROD DIA.	COLUMN LOAD RATINGS	WT/LBS	LIST PRICE
WWXT1504-S	1.5	X	4	12	1	FULL PSI	8	140.90
WWXT1506-S	1.5	X	6	14	1	FULL PSI	9	147.70
WWXT1508-S	1.5	X	8	16	1	FULL PSI	10	154.40
WWXT1510-S	1.5	X	10	18	1	FULL PSI	11	161.10
WWXT1512-S	1.5	X	12	20	1	FULL PSI	13	167.70
WWXT1514-S	1.5	X	14	22	1	FULL PSI	14	174.40
WWXT1516-S	1.5	X	16	24	1	FULL PSI	15	181.20
WWXT1518-S	1.5	X	18	26	1	4800 (270 PSI)*	16	188.70
WWXT2004-S	2	X	4	12	1.25	FULL PSI	12	174.90
WWXT2006-S	2	X	6	14	1.25	FULL PSI	13	183.50
WWXT2008-S	2	X	8	16	1.25	FULL PSI	15	192.00
WWXT2010-S	2	X	10	18	1.25	FULL PSI	17	200.50
WWXT2012-S	2	X	12	20	1.25	FULL PSI	19	208.80
WWXT2014-S	2	X	14	22	1.25	FULL PSI	20	217.30
WWXT2016-S	2	X	16	24	1.25	FULL PSI	22	225.90
WWXT2018-S	2	X	18	26	1.25	FULL PSI	24	234.40
WWXT2020-S	2	X	20	28	1.25	FULL PSI	25	242.80
WWXT2024-S	2	X	24	32	1.25	7300 (2330 PSI)*	29	259.50
WWXT2030-S	2	X	30	38	1.25	4900 (1560 PSI)*	34	285.10
WWXT2032-S	2	X	32	40	1.25	4400 (1400 PSI)*	36	294.90
WWXT2036-S	2	X	36	44	1.25	3500 (1120 PSI)*	39	312.90
WWXT2504-S	2.5	X	4	12	1.50	FULL PSI	16	210.60
WWXT2506-S	2.5	X	6	14	1.50	FULL PSI	18	221.30
WWXT2508-S	2.5	X	8	16	1.50	FULL PSI	20	232.10
WWXT2510-S	2.5	X	10	18	1.50	FULL PSI	22	242.70
WWXT2512-S	2.5	X	12	20	1.50	FULL PSI	25	253.20
WWXT2514-S	2.5	X	14	22	1.50	FULL PSI	27	264.00
WWXT2516-S	2.5	X	16	24	1.50	FULL PSI	29	274.80
WWXT2518-S	2.5	X	18	26	1.50	FULL PSI	31	285.60
WWXT2520-S	2.5	X	20	28	1.50	FULL PSI	34	296.20
WWXT2524-S	2.5	X	24	32	1.50	FULL PSI	38	317.10
WWXT2530-S	2.5	X	30	38	1.50	10300 (2100 PSI)*	45	349.20
WWXT2532-S	2.5	X	32	40	1.50	9200 (1880 PSI)*	47	360.90
WWXT2536-S	2.5	X	36	44	1.50	7400 (1510 PSI)*	51	383.20

*THESE MODELS HAVE A COLUMN LOAD RESTRICTION THAT LIMITS THE MAXIMUM PUSH LOAD THAT THE CYLINDER CAN SAFELY BE OPERATED AT.



C Y L I N D E R S

Standard 3000 PSI Welded Cross Tube Cylinders

MODEL	BORE x STROKE		RETRACT	ROD DIA.	COLUMN LOAD RATINGS	WT/LBS	LIST PRICE
WWXT3004-S	3	X 4	12	1.5	FULL PSI	19	246.70
WWXT3006-S	3	X 6	14	1.5	FULL PSI	22	258.60
WWXT3008-S	3	X 8	16	1.5	FULL PSI	24	270.30
WWXT3010-S	3	X 10	18	1.5	FULL PSI	27	282.00
WWXT3012-S	3	X 12	20	1.5	FULL PSI	29	293.40
WWXT3014-S	3	X 14	22	1.5	FULL PSI	32	305.30
WWXT3016-S	3	X 16	24	1.5	FULL PSI	34	317.10
WWXT3018-S	3	X 18	26	1.5	FULL PSI	36	328.80
WWXT3020-S	3	X 20	28	1.5	20700 (2930 PSI)*	39	340.50
WWXT3024-S	3	X 24	32	1.5	15200 (2150 PSI)*	44	363.30
WWXT3030-S	3	X 30	38	1.5	10300 (1460 PSI)*	51	398.20
WWXT3032-S	3	X 32	40	1.5	9200 (1300 PSI)*	54	411.10
WWXT3036-S	3	X 36	44	1.5	7400 (1050 PSI)*	59	435.20
WWXT3040-S	3	X 40	48	1.5	6100 (860 PSI)*	63	458.30
WWXT3048-S	3	X 48	56	1.5	4400 (620 PSI)*	73	507.50
WWXT3508-S	3.5	X 8	18	1.75	FULL PSI	33	332.60
WWXT3510-S	3.5	X 10	20	1.75	FULL PSI	36	346.80
WWXT3512-S	3.5	X 12	22	1.75	FULL PSI	39	360.90
WWXT3514-S	3.5	X 14	24	1.75	FULL PSI	42	375.10
WWXT3516-S	3.5	X 16	26	1.75	FULL PSI	45	389.00
WWXT3518-S	3.5	X 18	28	1.75	FULL PSI	48	403.20
WWXT3520-S	3.5	X 20	30	1.75	FULL PSI	51	417.80
WWXT3524-S	3.5	X 24	34	1.75	26200 (2730 PSI)*	57	447.20
WWXT3530-S	3.5	X 30	40	1.75	18000 (1870 PSI)*	67	487.50
WWXT3532-S	3.5	X 32	42	1.75	16100 (1670 PSI)*	70	502.30
WWXT3536-S	3.5	X 36	46	1.75	13100 (1360 PSI)*	76	530.90
WWXT3540-S	3.5	X 40	50	1.75	10900 (1130 PSI)*	82	559.70
WWXT3548-S	3.5	X 48	58	1.75	7800 (810 PSI)*	94	615.70
WWXT4008-S	4	X 8	18	2	FULL PSI	41	401.50
WWXT4010-S	4	X 10	20	2	FULL PSI	45	419.70
WWXT4012-S	4	X 12	22	2	FULL PSI	49	436.40
WWXT4014-S	4	X 14	24	2	FULL PSI	52	453.00
WWXT4016-S	4	X 16	26	2	FULL PSI	56	469.40
WWXT4018-S	4	X 18	28	2	FULL PSI	60	486.20
WWXT4020-S	4	X 20	30	2	FULL PSI	63	502.90
WWXT4024-S	4	X 24	34	2	37200 (2960 PSI)*	71	536.30
WWXT4030-S	4	X 30	40	2	24900 (1980 PSI)*	82	585.60
WWXT4032-S	4	X 32	42	2	22400 (1780 PSI)*	85	602.30
WWXT4036-S	4	X 36	46	2	18100 (1440 PSI)*	93	635.90
WWXT4040-S	4	X 40	50	2	14600 (1160 PSI)*	100	669.50
WWXT4048-S	4	X 48	58	2	10600 (840 PSI)*	115	736.90

*THESE MODELS HAVE A COLUMN LOAD RESTRICTION THAT LIMITS THE MAXIMUM PUSH LOAD THAT THE CYLINDER CAN SAFELY BE OPERATED AT.