




C Y L I N D E R S

3000 PSI Welded Cross Tube Cylinders



FEATURES:

- 100% tested for quality assurance
- Hard chrome rod plating for corrosion & wear resistance
- Cast steel end fittings for high strength & low cost
- Top port design
- SAE O-ring ports for reliable & leak-free connection
- Thread-in gland design for serviceability
- Grease zerk included for extended pin life
- High luster black paint for protection from the elements
- Individually bagged & boxed for secure storage & transport

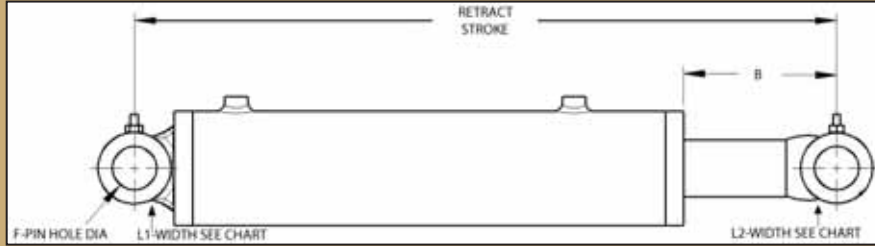

MODEL	BORE	PORTS	CROSS TUBE WIDTH		B	F
			L1-BASE END	L2-ROD END		
WWXT1500-S	1.5	SAE 4	2.25	2.00	2.62	3/4
WWXT2000-S	2.0	SAE 6	2.75	2.25	2.25	1
WWXT2500-S	2.5	SAE 8	3.25	2.25	2.25	1
WWXT3000-S	3.0	SAE 8	3.75	2.25	2.25	1
WWXT3500-S	3.5	SAE 8	4.25	2.25	4.00	1.25
WWXT4000-S	4.0	SAE 8	4.75	2.50	3.75	1.50

MODEL	BORE x STROKE			RETRACT	ROD DIA.	COLUMN LOAD RATINGS	WT/LBS	LIST PRICE
WWXT1504-S	1.5	X	4	12	1	FULL PSI	8	166.00
WWXT1506-S	1.5	X	6	14	1	FULL PSI	9	174.00
WWXT1508-S	1.5	X	8	16	1	FULL PSI	10	182.00
WWXT1510-S	1.5	X	10	18	1	FULL PSI	11	190.00
WWXT1512-S	1.5	X	12	20	1	FULL PSI	13	198.00
WWXT1514-S	1.5	X	14	22	1	FULL PSI	14	206.00
WWXT1516-S	1.5	X	16	24	1	FULL PSI	15	214.00
WWXT1518-S	1.5	X	18	26	1	4800 (270 PSI)*	16	222.00
WWXT2004-S	2	X	4	12	1.25	FULL PSI	12	206.00
WWXT2006-S	2	X	6	14	1.25	FULL PSI	13	216.00
WWXT2008-S	2	X	8	16	1.25	FULL PSI	15	226.00
WWXT2010-S	2	X	10	18	1.25	FULL PSI	17	236.00
WWXT2012-S	2	X	12	20	1.25	FULL PSI	19	246.00
WWXT2014-S	2	X	14	22	1.25	FULL PSI	20	256.00
WWXT2016-S	2	X	16	24	1.25	FULL PSI	22	266.00
WWXT2018-S	2	X	18	26	1.25	FULL PSI	24	276.00
WWXT2020-S	2	X	20	28	1.25	FULL PSI	25	286.00
WWXT2024-S	2	X	24	32	1.25	7300 (2330 PSI)*	29	306.00
WWXT2030-S	2	X	30	38	1.25	4900 (1560 PSI)*	34	336.00
WWXT2032-S	2	X	32	40	1.25	4400 (1400 PSI)*	36	347.00
WWXT2036-S	2	X	36	44	1.25	3500 (1120 PSI)*	39	369.00
WWXT2504-S	2.5	X	4	12	1.50	FULL PSI	16	248.00
WWXT2506-S	2.5	X	6	14	1.50	FULL PSI	18	261.00
WWXT2508-S	2.5	X	8	16	1.50	FULL PSI	20	273.00
WWXT2510-S	2.5	X	10	18	1.50	FULL PSI	22	286.00
WWXT2512-S	2.5	X	12	20	1.50	FULL PSI	25	298.00
WWXT2514-S	2.5	X	14	22	1.50	FULL PSI	27	311.00
WWXT2516-S	2.5	X	16	24	1.50	FULL PSI	29	324.00
WWXT2518-S	2.5	X	18	26	1.50	FULL PSI	31	336.00
WWXT2520-S	2.5	X	20	28	1.50	FULL PSI	34	349.00
WWXT2524-S	2.5	X	24	32	1.50	FULL PSI	38	373.00
WWXT2530-S	2.5	X	30	38	1.50	10300 (2100 PSI)*	45	411.00
WWXT2532-S	2.5	X	32	40	1.50	9200 (1880 PSI)*	47	425.00
WWXT2536-S	2.5	X	36	44	1.50	7400 (1510 PSI)*	51	451.00

*THESE MODELS HAVE A COLUMN LOAD RESTRICTION THAT LIMITS THE MAXIMUM PUSH LOAD THAT THE CYLINDER CAN SAFELY BE OPERATED AT.



C Y L I N D E R S

3000 PSI Welded Cross Tube Cylinders

MODEL	BORE x STROKE		RETRACT	ROD DIA.	COLUMN LOAD RATINGS	WT/LBS	LIST PRICE
WWXT3004-S	3	X 4	12	1.5	FULL PSI	19	291.00
WWXT3006-S	3	X 6	14	1.5	FULL PSI	22	305.00
WWXT3008-S	3	X 8	16	1.5	FULL PSI	24	318.00
WWXT3010-S	3	X 10	18	1.5	FULL PSI	27	332.00
WWXT3012-S	3	X 12	20	1.5	FULL PSI	29	346.00
WWXT3014-S	3	X 14	22	1.5	FULL PSI	32	360.00
WWXT3016-S	3	X 16	24	1.5	FULL PSI	34	373.00
WWXT3018-S	3	X 18	26	1.5	FULL PSI	36	387.00
WWXT3020-S	3	X 20	28	1.5	20700 (2930 PSI)*	39	401.00
WWXT3024-S	3	X 24	32	1.5	15200 (2150 PSI)*	44	428.00
WWXT3030-S	3	X 30	38	1.5	10300 (1460 PSI)*	51	469.00
WWXT3032-S	3	X 32	40	1.5	9200 (1300 PSI)*	54	484.00
WWXT3036-S	3	X 36	44	1.5	7400 (1050 PSI)*	59	512.00
WWXT3040-S	3	X 40	48	1.5	6100 (860 PSI)*	63	539.00
WWXT3048-S	3	X 48	56	1.5	4400 (620 PSI)*	73	597.00
WWXT3508-S	3.5	X 8	18	1.75	FULL PSI	33	392.00
WWXT3510-S	3.5	X 10	20	1.75	FULL PSI	36	408.00
WWXT3512-S	3.5	X 12	22	1.75	FULL PSI	39	425.00
WWXT3514-S	3.5	X 14	24	1.75	FULL PSI	42	442.00
WWXT3516-S	3.5	X 16	26	1.75	FULL PSI	45	458.00
WWXT3518-S	3.5	X 18	28	1.75	FULL PSI	48	475.00
WWXT3520-S	3.5	X 20	30	1.75	FULL PSI	51	492.00
WWXT3524-S	3.5	X 24	34	1.75	26200 (2730 PSI)*	57	526.00
WWXT3530-S	3.5	X 30	40	1.75	18000 (1870 PSI)*	67	574.00
WWXT3532-S	3.5	X 32	42	1.75	16100 (1670 PSI)*	70	591.00
WWXT3536-S	3.5	X 36	46	1.75	13100 (1360 PSI)*	76	625.00
WWXT3540-S	3.5	X 40	50	1.75	10900 (1130 PSI)*	82	659.00
WWXT3548-S	3.5	X 48	58	1.75	7800 (810 PSI)*	94	725.00
WWXT4008-S	4	X 8	18	2	FULL PSI	41	473.00
WWXT4010-S	4	X 10	20	2	FULL PSI	45	494.00
WWXT4012-S	4	X 12	22	2	FULL PSI	49	514.00
WWXT4014-S	4	X 14	24	2	FULL PSI	52	533.00
WWXT4016-S	4	X 16	26	2	FULL PSI	56	553.00
WWXT4018-S	4	X 18	28	2	FULL PSI	60	572.00
WWXT4020-S	4	X 20	30	2	FULL PSI	63	592.00
WWXT4024-S	4	X 24	34	2	37200 (2960 PSI)*	71	631.00
WWXT4030-S	4	X 30	40	2	24900 (1980 PSI)*	82	689.00
WWXT4032-S	4	X 32	42	2	22400 (1780 PSI)*	85	709.00
WWXT4036-S	4	X 36	46	2	18100 (1440 PSI)*	93	748.00
WWXT4040-S	4	X 40	50	2	14600 (1160 PSI)*	100	788.00
WWXT4048-S	4	X 48	58	2	10600 (840 PSI)*	115	867.00

*THESE MODELS HAVE A COLUMN LOAD RESTRICTION THAT LIMITS THE MAXIMUM PUSH LOAD THAT THE CYLINDER CAN SAFELY BE OPERATED AT.

UNIVERSAL SEAL KITS		
PART NO.	DESCRIPTION	LIST PRICE
PMCK-WW1500	1.5 BORE	49.00
PMCK-WW2000	2 BORE	61.00
PMCK-WW2500	2.5 BORE	62.00
PMCK-WW3000	3 BORE	64.00
PMCK-WW3500	3.5 BORE	89.00
PMCK-WW4000	4 BORE	114.00